

스테어즈 수중모터펌프 ST

특장점

- 스테인레스 스틸 사용으로
수려한 외관
- 적은 기동 토크로 안전성 향상
- 다양한 종류로 넓은 운전범위
- 높은 효율로 경제성 확보

적용분야

- 빌딩, 학교, 병원, 아파트등의
급수 및 가압용
- 농장 및 양어장 등의 농어업용
- 하우스 재배 및 수막용
- 섬유, 피혁, 도금, 음료 등의 공업용
- 지열 보일러용





International
Organization for
Standardization



EN286-1-2



Selection Chart

ST 4"


MODEL	HP	구경 (mm)	전양정 (M)	유 량 표(ton/day)															
				25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400
ST-0734	3	32	318				72	66	61	55	48	42	34	26	15				
ST-1027			270		100	95	89	82	75	69	60	46	34						
ST-1321			204		115	113	105	92	79	61	(190M-40t/d)								
ST-1819			178		158	147	129	108	76	(165M-48t/d)									
ST-2515		40	136		187	167	129	72											
ST-3514		50	128	259	234	194	126	(115M-59t/d)											
ST-4008			74	360	259	(60M-201t/d)													
ST-5509			76	381	264	(10M-432t/d, 60M-193t/d)													
ST-6007			64	436	236	(15M-489t/d)													
ST-8005			44	446	(10M-662t/d, 35M-250t/d)														
ST-1042	5	32	412				100	96	92	88	83	79	73	67	61	54	46	35	23
ST-1335			327				115	112	107	100	93	86	77	67	54	(315M-47t/d)			
ST-1830			283				158	147	136	123	108	89	61	(270M-32t/d)					
ST-2526		40	234			187	180	164	146	122	95	43	(220M-57t/d)						
ST-3522		50	200		259	239	216	184	142	76	(185M-46t/d)								
ST-4014			129	360	352	302	216	(115M-129t/d)											
ST-5515			128	421	374	308	200	(110M-144t/d)											
ST-6011			100	489	390	260	(90M-142t/d)												
ST-8009			80	643	413	84	(15M-662t/d)												
ST-3534	7.5	50	308			259	243	230	216	194	175	146	109	68	(290M-28t/d)				
ST-4021			194		360	352	321	279	214	115									
ST-5522			191	432	410	374	331	270	198	91									
ST-6017			157	489	455	401	331	230	72	(140M-146t/d)									
ST-8014			126	662	590	437	259	(115M-115t/d)											
ST-3543	10	50	394			259	256	248	237	226	215	200	183	162	136	103	70	30	
ST-5529			251	432	427	403	374	347	308	262	204	105	(235M-70t/d)						

Selection Chart

ST 6"

MODEL	HP	구경 (mm)	전양정 (M)	유 량 표(ton/day)															
				25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400
ST50-08	7.5	80	175		419	378	326	259	144	(160M-87t/d)									
ST75-05			110	550	489	397	233	(15M-576t/d)											
ST135-03			63	901	419	(10M-1080t/d)													
ST180-02			43	1008	(10M-1368t/d, 35M-662t/d)														
ST220-02			35	936	(5M-1728t/d)														
ST50-10	10		225			411	381	345	291	222	122	(210M-74t/d)							
ST75-07			156	576	547	495	430	331	(140M-244t/d)										
ST135-05			108	1022	820	558	(15M-1080t/d, 90M-313t/d)												
ST180-03			67	1224	792	(15M-1368t/d, 60M-396t/d)													
ST220-03			54	1396	(10M-1728t/d, 45M-792t/d)														
ST50-15	15		335			432	428	407	385	360	331	296	252	198	123	39			
ST75-11			245		576	525	514	470	436	384	318	220							
ST135-07			152	1555	960	815	640	374	(140M-172t/d)										
ST180-05			110	1332	1152	914	338	(25M-1368t/d)											
ST220-04			73	1598	1008	(20M-1728t/d, 60M-820t/d)													
ST75-14	20		312		576	561	545	521	493	463	427	381	331	262	165				
ST135-10			217	1080	1026	932	835	734	590	378	155								

펌프설치도

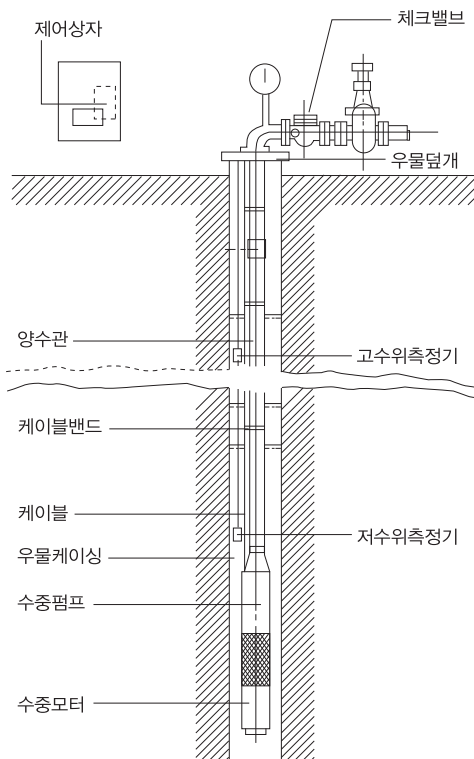

운전 허용 전류값(A)

HP	PH	Volt	I _{max} (A)
1HP	1PH	220V	9.8
	3PH	220V	4.8
		380V	2.9
2HP	1PH	220V	13.2
	3PH	220V	8.1
		380V	4.9
3HP	1PH	220V	17
	3PH	220V	10.9
		380V	6.6
		460V	5.5
5HP	3PH	220V	17.8
		380V	10.8
		460V	8.9
7.5HP	3PH	220V	26.4
		380V	16
		460V	13.2
10HP	3PH	380V	22.8